

Bowl-Tronics Enterprises Incorporated

Address: 1115 Sherwood Ave.
Elgin IL. 60120
Website: www.bowl-tronics.com
E-mail: rick@bowl-tronics.com

Phone: 847-741-4500
Fax: 847-741-0914

3 AMP Breaker Conversion Kit (BRK-3)

3 AMP Breaker Conversion Kit Theory


By replacing the old 3.2 amp fuse in your Brunswick electrical box with the 3 AMP Breaker Conversion Kit. You will no longer have to change fuses anymore. Just reset the breaker if there is a problem.

Installation Instructions

Remember to remove power before performing any installation!!

Installing BRK-3

Cut the wires going to the 3.2 amp fuse holder. Be sure to cut them close to give you enough wire to crimp on the 1/4" spade connectors. Remove the 3.2 amp fuse holder and set aside. Mount the new mounting plate with hardware provided. Place the screws in the same holes as the 3.2 amp's fuse holder. Install the new breaker in the new mounting plate hole by pushing it through the hole and push till you here it pop into place. Crimp the 1/4" spade connectors on the wires and slide them on the breakers spade terminals. Be sure to push evenly and slowly as not to damage the spade terminals on the breaker, it's a tight fit. Hook power back up to chassis and power up to test.

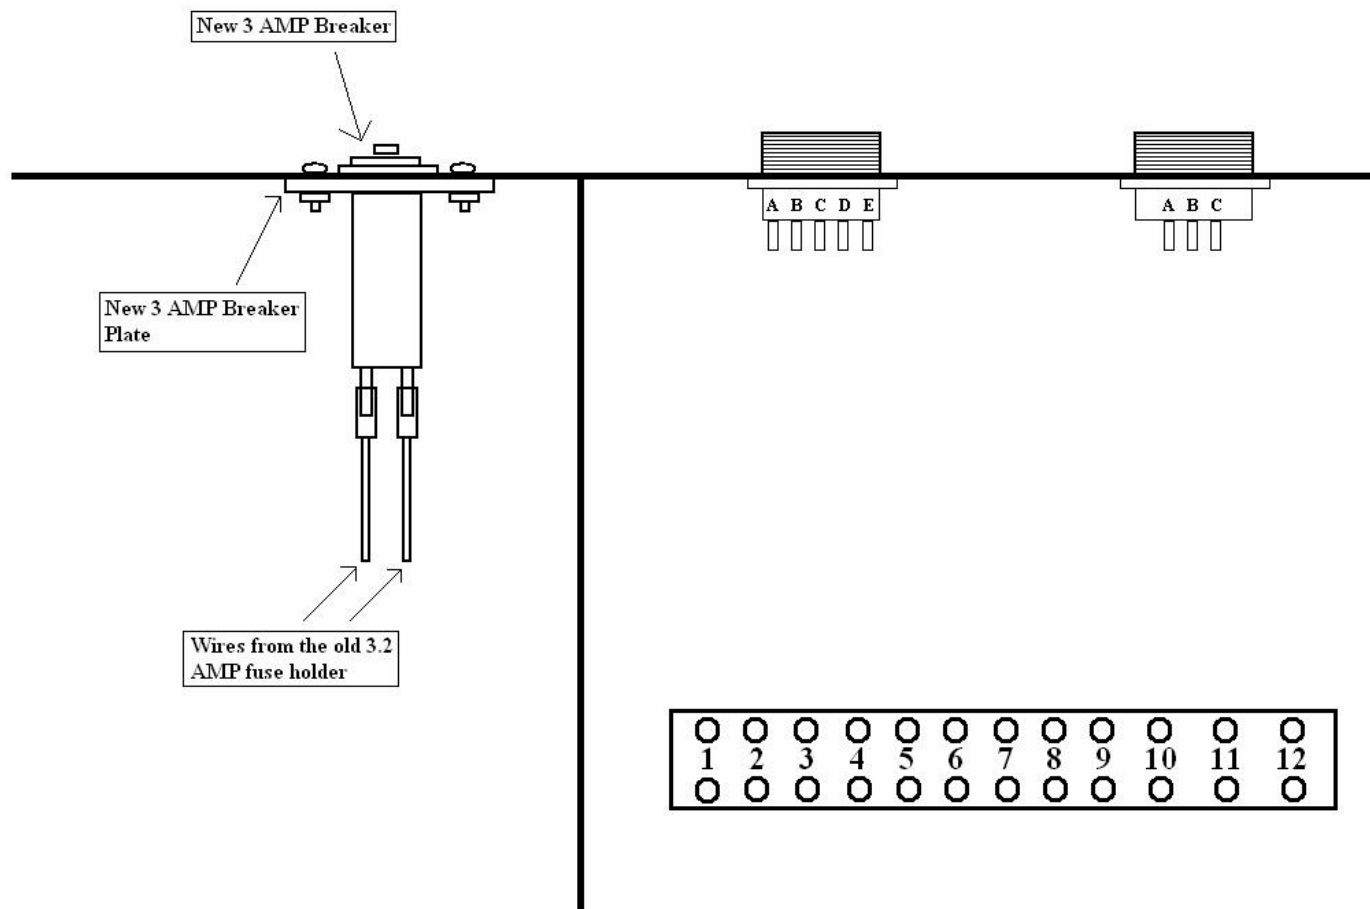

Notes:

For Repair Send Faulty Parts to:

**Address: BOWL-TRONICS
1115 Sherwood Ave
Elgin IL. 60120**

**Phone: 847-741-4500
Fax: 847-741-0914**

Visit our web site at www.bowl-tronics.com